


# HANDBAG WITH MEGA HOOP DESIGN


Design: Husqvarna Viking Sewing Studio

Sew this fashionable hand bag in wool fabric and artificial leather embellished with Mega Hoop designs. 1/4" (6 mm) seam allowance included in all measurements.



## CUT

- From wool - two pieces 20" x 12" (50 x 30 cm).
- From artificial leather one strip, 26" (66 cm) long, according to the measurements on the illustration.



## SEWING SUPPLIES

- Husqvarna Viking Designer (for optional Mega Hoop embroidery)
- 3/8 yard (30 cm) Wool fabric
- 1/4 yd (20 cm) Artificial leather
- 1 Zipper, 14" (35 cm)
- Sewing thread
- Sulky Rayon Embroidery thread
- Fusible interfacing
- Stretch Needle
- Mega Hoop (412 62 55-02)
- Embroidery disk/d-Card 117, Mega Borders by Anna Haraldsson


- Two strips for the zipper, 5/8" x 14 1/4" (1,5 x 36 cm).
- Two strips for handle, 3/4" x 18" (2 x 45 cm).

## EMBROIDER


Press fusible interfacing on the backside of the front and back pieces. Select embroidery design 9. Hoop the wool fabric and embroider the design on the front piece only, or on both sides of the bag. Cut down the embroidered pieces with the design centered to 6 3/8" x 13 3/4" (17 x 36 cm).

## SEW

Snap on Presser Foot A. Select straight stitch. Pin the lower and side edges of the front and back piece to the the artificial leather strip, right sides together. Sew with straight stitch around the three sides. Cut in the corner

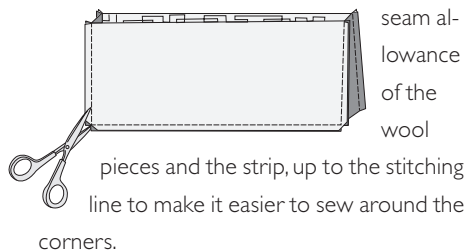

Snap on Presser Foot E for to sew the artificial leather strips to the

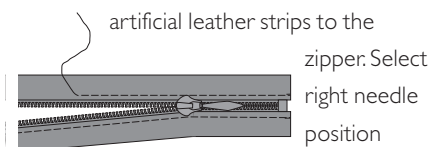

straight stitch. Place the edge of the artificial leather strip on the zipper, close to the zipper teeth, as shown and stitch along the side. Sew the other strip on the opposite side of the zipper in the same way.

Snap on Presser Foot D. Select left needle position straight stitch. Place the strips for the handle wrong sides together and stitch the sides.

Snap on Presser Foot A. Select center needle position, straight stitch. Unzip the zipper. Place the leather strips with the zipper to the upper edges of the front and back pieces, right sides together and stitch the sides with 1/4" (6 mm) seam allowance.

Place the handle inside the bag and pull out the ends to the wrong side between the zipper ends and the upper side edges. Stitch through all layers to stitch the sides and to fasten the handle.

Turn the finished bag right side out through the zipper opening.

Top stitch under the upper side seam to reinforce the handle.

